









SLI 	SBI 	SBIA 
--	---	--



§ EN 378	 HFKW (HFC) HFCKW (HCFC)	 R12 R502 NH3
----------	--	--

Typ	PS	PF	TS
SLI 6; SLI 1/4; SLI 10; SLI 3/8; SLI 12; SLI 1/2; SLI 15; SLI 16 (5/8)	47 bar(a)	51,7 bar(a)	≤ 80 °C
SLI 18; SLI 3/4; SLI 22 (7/8); SBI; SBIA	36 bar(a)	39,6 bar(a)	
SLI 28; SLI 1 1/8	35 bar(a)	38,5 bar(a)	

			
R22	< 30 ppm	30 – 150 ppm	> 150 ppm
R134a	< 60 ppm	60 – 100 ppm	> 100 ppm
R404A	< 20 ppm	20 – 100 ppm	> 100 ppm
R407C	< 20 ppm	20 – 130 ppm	> 130 ppm
R410A	< 40 ppm	40 – 150 ppm	> 150 ppm
R507A	< 20 ppm	20 – 100 ppm	> 100 ppm

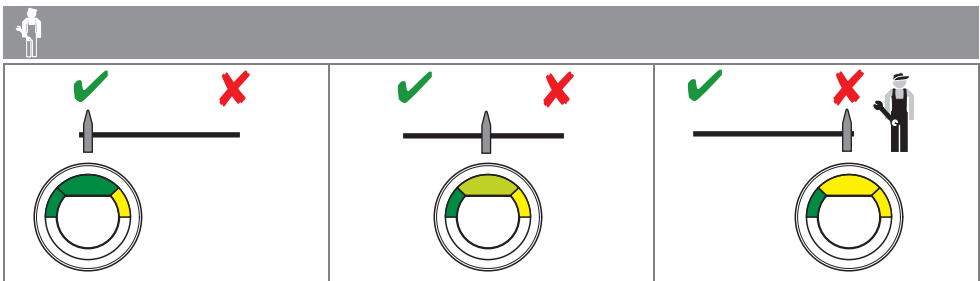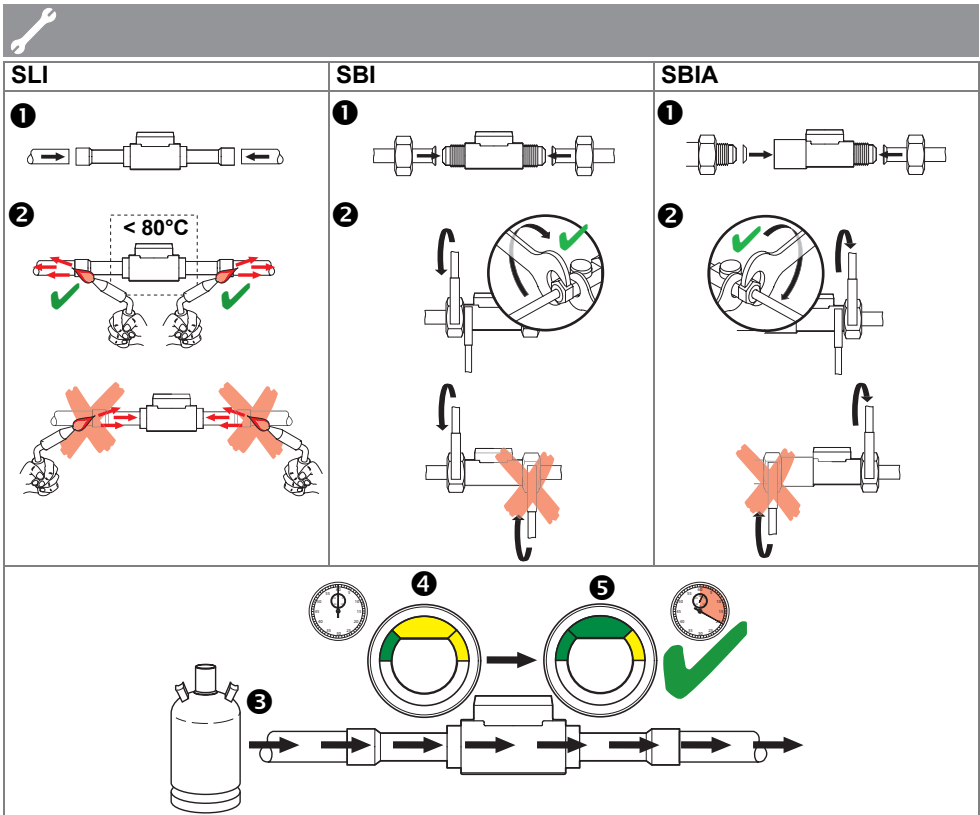

Automation and Control Solutions

Honeywell GmbH
 Hardhofweg
 74821 MOSBACH
 GERMANY
 Phone: +49 (0) 6261 81-475
 Fax: +49 (0) 6261 81-461
 Email: cooling.mosbach@honeywell.com
www.honeywell-cooling.com

Honeywell

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Z.A. La Pièce 16, 1180 Rolle, Switzerland by its authorised representative Honeywell GmbH

MU1H-1922GE23 R0211 - EB-SG-01
 © 2011 Honeywell GmbH
 Subject to change without notice • All rights reserved